

VOCOLINC

VP2

Smart Power Strip



Works with
Apple HomeKit




WORKS WITH
amazon alexa



works with the
Google Assistant

Product Overview:

VP2 Smart Power Strip can be controlled through Wi-Fi wireless network. You can switch on/off outlet and monitor its status wirelessly.

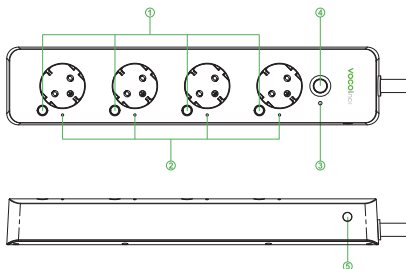

1	Power Button	
2	Power Status LED	Light on/off indicates on/off status respectively.
3	WiFi Connection LED	
4	Reset Button	Tap: Switching all outlets on/off simultaneously Press & hold for about 10 seconds: factory reset. All connection data will be cleared. Must remove VP2 Smart Power Strip from the app and then add it back.
5	Overload Protection Switch	When loads hit the maximum capacity, overload protection will cut off power supply. Manually pressing the switch can recover the power supply.

What's Included:

- VP2 Smart Power Strip
- Quick Start Guide

Features:

- Smart AC outlet
- Works with Apple HomeKit
- Works with Amazon Alexa
- Works with the Google Assistant

System Requirement:

- Mobile device running iOS12.0+ or Android OS4.3+
- Existing Wi-Fi network
- Stable Internet

Electrical Ratings

Input: 230V~, 50Hz

Output: Max 10A 230V~ 50Hz Max 2300W μ (Pure Resistive Load)

Operating Frequency: 2400-2483.5MHz

Max. transmit power: 12dBm

General use ONLY

Indoor dry location use ONLY

LED Status Indication

Status	LED Indication
Search Wi-Fi	Green blinks quickly
Adding a device	Green blinks slowly
A device added Successfully	Red blinks slowly 5 times
Identifying a device	Red blinks slowly 5 times
Connected to Wi-Fi	Green stays on
Disconnected from Wi-Fi	Red blinks quickly
Reset	Press & Hold for 10s, then green blinks quickly
OTA in Progress	Red blinks slowly
OTA done	Red blinks quickly 4 times

Safety Warnings

- Plug directly into electric outlet (not into extension cord)
- For indoor use only
- Unplug from outlet before cleaning
- DO NOT clean with liquid
- DO NOT remove ground pin (round pin) as there is risk of electric shock
- DO NOT use in wet or damp areas
- Keep children away from Power Strip
- DO NOT exceed the recommended electrical ratings
- DO NOT use in precision timing applications where inaccurate timing could be dangerous (sunlamps, saunas, etc.)
- DO NOT use with devices that should not be operated unattendedly.
- After switching off the the main power, DO NOT operate until the main power indicator goes completely off (about 2 seconds delay)
- DO NOT use the device when the casing is broken
- DO NOT connected in series
- DO NOT operated covered
- Voltage-free only with unplugged plug

RED Declaration of Conformity (DoC)

Unique identification of this DoC:

We,

Foneric Technology Co., Ltd.

4F, Fuxing Bldg, Binglang Road, Futian Free Trade Zone, SHENZHEN, China

declare under our sole responsibility that the product:

product name: VOCOLinc VP2 Smart Power Strip

trade name: VOCOLinc

type or model: VP2

relevant supplementary information:

(e.g. lot, batch or serial number, sources and numbers of items)

to which this declaration relates is in conformity with the essential requirements and other relevant requirements of the RED Directive (2014/53/EU).

The product is in conformity with the following standards and/or other normative documents:

HEALTH & SAFETY (Art. 3(1)(a)): DIN VDE 0620-1:2016/A1:2017,
DIN VDE 0620-2-1:2016/A1:2017,
EN 61058-1-2:2016, EN IEC 61058-1:2018; EN 62311:2008;

EMC (Art. 3(1)(b)): EN 61000-3-2:2014; EN 61000-3-3:2013; EN IEC 61058-1:2018;
EN 61058-1-2:2016; ETSI EN 301 489-1 V2.2.0:2017;
Draft ETSI EN 301 489-17 V3.2.0:2017;

SPECTRUM (Art. 3(2)): EN 300 328 V2.1.1:2016

OTHER (incl. Art. 3(3) and voluntary specs):

Other Union harmonization legislation (where applicable): N/A

Accessories: N/A

Software: N/A

Technical file held by: Foneric Technology Co., Ltd.

Place and date of issue (of this DoC): 2019/11/4

Signed by or for the manufacturer:
(Signature of authorised person)

Name (in print):

Title: Project Director



VOCOLinc APP



Setup code
Code de Configuration