

Wall mounted unit
Air Conditioning
Technical Data
FTXF-D



FTXF20D5V1B
FTXF25D5V1B
FTXF35D5V1B
FTXF42D5V1B
FTXF50D2V1B
FTXF60D2V1B
FTXF71D2V1B

TABLE OF CONTENTS

FTXF-D

1	Features	4
	FTXF-D	4
2	Specifications	5
3	Options	8
4	Dimensional drawings	10
5	Centre of gravity	11
6	Piping diagrams	13
7	Wiring diagrams	15
	Wiring Diagrams - Single Phase	15
8	Sound data	16
	Sound Power Spectrum	16
	Sound Pressure Spectrum	20

1 Features


















1 - 1 FTXF-D

Wall mounted unit for low energy consumption and pleasant comfort

1

- > Seasonal efficiency values up to A++ in cooling
- > Onecta app (optional): control your indoor from any location with an app, via your local network or internet.
- > Quiet in operation down to 21 dBA
- > Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency



- | | | | | | | | | |
|---|--|---|---|---|---|---|---|---|
| 
Onecta app
(optional) | 
Econo mode
(25, 35 class) | 
Energy saving during
standby mode
(25, 35 class) | 
Fan only | 
Comfort mode
(25, 35 class) | 
Powerful
mode | 
Auto cooling-
heating
changeover | 
Indoor
unit silent
operation | 
Vertical auto
swing |
| 
Auto fan
speed | 
Fan speed
steps
(5 steps) | 
Dry
programme | 
Air filter | 
24 hour timer | 
Infrared
remote control | 
Auto-restart | 
Self diagnosis | |

2 Specifications

1 - 1 FTXF-D

Technical specifications				FTXF20D	FTXF25D	FTXF35D	FTXF42D	
Power input	Cooling	Nom.	kW	0.023		0.029	0.040	
	Heating	Nom.	kW	0.023		0.029	0.040	
Casing	Colour			White				
Dimensions	Unit	Height	mm	286				
		Width	mm	770				
		Depth	mm	225				
	Packed unit	Height	mm	305				
		Width	mm	830				
		Depth	mm	360				
Weight	Unit		kg	8.00		8.50	9.00	
	Packed unit		kg	10		11		
Packing	Weight			kg				
Heat exchanger	Length			mm				
	Rows	Quantity		2				
	Fin pitch			mm				
	Stages	Quantity		18				
	Tube type			ø5 Hi-XB				
	Fin	Type		ML fin (Multi louver)				
	Heat exchanger 2	Length			mm			600
		Rows	Quantity					1
Fin pitch			mm			1.40		
Stages		Quantity					8	
Fan	Type			Cross flow fan				
	Quantity			1				
Fan	Air flow rate	Cooling	High	m ³ /min	9.8	10.0	11.5	12.6
				cfm	346	353	406	45
			Medium	m ³ /min		8		9
			cfm	286	289	298	310	
		Low	m ³ /min	6.0	6.2	6.4	6.9	
			cfm	212	219	226	243	
	Heating	High	m ³ /min		4.3		4.4	4.9
			cfm		152		155	173
		Medium	m ³ /min	8.3	8.4	8.6	8.8	
			cfm	293	297	302	310	
		Low	m ³ /min	6.2	6.4	6.5	6.7	
			cfm	219	226	230	236	
Fan	Air flow rate	Heating	Low	m ³ /min	6.2	6.4	6.5	6.7
				cfm	219	226	230	236
				Silent operation	m ³ /min		5.3	
	cfm		187		183			
Fan motor	Model			MM6K11S20VA				
	Speed	Steps			5 + silent, + auto			
		Cooling	High	rpm	1,000	1,020	1,120	1,250
	Medium			rpm	830		870	1,010
	Low		rpm	660		700	780	
	Heating	High	Silent operation	rpm	530		540	600
			High	rpm	1,040		1,140	1,250
		Medium	rpm	880		930	1,010	
		Low	rpm	710		760	780	
		Silent operation	rpm		610		650	
	Output	Rated		W				
	Sound power level	Cooling			53.0		54.0	59.0
Heating				55.0		56.0	59.0	
Sound pressure level	Cooling	High	dBA	39.0	40.0	43.0	45.0	
			Medium	dBA	33.0		34.0	36.0
		Low	dBA	25.0	26.0	27.0	30.0	
		Silent operation			dBA	20.0		22.0
	Heating	High	dBA	39.0	40.0		44.0	
			Medium	dBA	34.0		35.0	34.0
		Low	dBA	28.0		29.0	28.0	
		Silent operation			dBA	21.0		22.0
Piping connections	Liquid	OD	mm	6				
		Gas	OD	mm	9.50			
	Drain			mm				
	Heat insulation			Both liquid and gas pipes				
Air filter	Type			Removable / washable				
Air direction control				Right, Left, Horizontal, Downward				
Temperature control				Microcomputer control				
Control systems	Infrared remote control			ARC470A1				
	Wired remote control			BRC073A1				

2 Specifications

1 - 1 FTXF-D

2

Technical specifications					FTXF50D		FTXF60D		FTXF71D		
Power input	Cooling	Nom.	kW		0.029				0.032		
	Heating	Nom.	kW		0.032				0.035		
Casing	Colour				White						
Dimensions	Unit	Height	mm		295						
		Width	mm		990						
		Depth	mm		263						
	Packed unit	Height	mm		368						
		Width	mm		1,080						
		Depth	mm		383						
Weight	Unit				kg						
	Packed unit				kg						
Packing	Weight				kg						
	Length				mm						
Heat exchanger	Rows	Quantity			2						
	Fin pitch				mm						
	Stages	Quantity			18						
	Passes	Quantity			6						
	Tube type				ø5 Hi-XB						
	Fin	Type				ML fin (Multi louver)					
		Length				mm					
	Heat exchanger 2	Rows	Quantity			1					
		Fin pitch				mm					
Stages		Quantity			8						
Heat exchanger 3	Length				mm						
	Rows	Quantity			1						
	Fin pitch				mm						
Fan	Stages				Quantity						
	Type				Cross flow fan						
	Air flow rate	Cooling	High	m ³ /min		16.8				17.3	
cfm					593				610		
Medium			m ³ /min		14.4				14.8		
			cfm		508				522		
Low			m ³ /min		11.9				12.2		
Silent operation		m ³ /min		10.5				10.7			
		cfm		367				377			
		Heating	High	m ³ /min		17.3				17.9	
				cfm		618				632	
		Medium	m ³ /min		14.8				15.8		
cfm			526				557				
Low	m ³ /min		12.2				12.8				
	cfm		434				452				
Silent operation	m ³ /min		10.7				11.3				
	cfm		381				399				
Fan motor	Model				MM9E17S21VA						
	Speed	Steps				5 + silent, + auto					
Cooling		High	rpm		1,040				1,070		
	rpm			920				940			
	Low	rpm		790				810			
		rpm		720				730			
Heating	High	rpm		1,070				1,100			
		rpm		940				990			
	Low	rpm		810				840			
		rpm		730				760			
Output	Rated				W						
Sound power level	Cooling	dBA			59		60		62		
	Heating	dBA			61				62		
Sound pressure level	Cooling	High	dBA		43		45		46		
			dBA		39		41		42		
		Low	dBA		34		36		37		
			dBA		31		33		34		
	Heating	High	dBA		42		44		45		
			dBA		38		40		41		
		Low	dBA		33		35		36		
			dBA		30		32		33		
		Piping connections				Liquid OD					
				mm							
				Gas OD							
				mm							
				Drain							
				mm							
				Heat insulation							
				mm							
Air filter	Type				Removable / washable						
Air direction control				Left, right, up and downwards							
Temperature control				Microcomputer control							

2 Specifications

1 - 1 FTXF-D

Technical specifications		FTXF50D	FTXF60D	FTXF71D
Control systems	Infrared remote control		ARC470A1	
Control systems	Wired remote control		BRC073A1	

Standard accessories: Installation manual; Quantity: 1;

Standard accessories: Operation manual; Quantity: 1;

Standard accessories: Batteries; Quantity: 1;

Standard accessories: Infrared remote control; Quantity: 1;

Standard accessories: AAA dry-cell batteries; Quantity: 2;

Standard accessories: Remote control holder; Quantity: 1;

Standard accessories: Mounting plate; Quantity: 1;

Standard accessories: Indoor unit fixing screws; Quantity: 2;

Standard accessories: General safety precautions; Quantity: 196;

Electrical specifications		FTXF20D	FTXF25D	FTXF35D	FTXF42D
Power supply	Phase			1~	
	Frequency	Hz		50	
	Voltage	V		220-440	

Electrical specifications		FTXF50D	FTXF60D	FTXF71D	
Power supply	Name		V1		
	Phase		1~		
	Frequency	Hz	50		
	Voltage	V	220-240		
Current	Nominal running current (RLA) - 50Hz	Heating A	0.34	0.37	0.40
	Nominal running current (RLA)	Cooling A	0.32	0.34	

Cooling: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB; equivalent piping length: 5m; level difference: 0m |

Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m (horizontal) |

See separate drawing for electrical data

3 Options

3 - 1 Options

3

ATXF-D
FTXF20-42D

Option kit	Product name	Remark	Applicable models														Factory										
			Class		Casing		DTAS																				
			20	R32 BMS	25	R32 BMS	35	R32 BMS	42	R32 BMS	20	R32 BMS	25	R32 BMS	35	R32 BMS	42	R32 BMS	20	R32 BMS	25	R32 BMS	35	R32 BMS	42	R32 BMS	
Daikin Online Controller	BRP069B45		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Wired remote control	BRC073A1	①	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Extension cord for wired remote control (-3-m)	BRCW901A03		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Extension cord for wired remote control (-8-m)	BRCW901A08		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Wiring adaptor (normal open contact - normal open pulse contact)	KRP413AB1S		✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗
Interface adaptor for DIII-NET	KRP928BB2S		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Central remote control	DCS302CA51		✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗
Unified ON/OFF controller	DCS301BA51		✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗
Schedule timer	DST301BA51		✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗
Intelligent Touch Manager	DCM601A5A		✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗
Modbus interface	EKMBOXA		✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗
Modbus gateway	RTD-RA		✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗
KNX interface	KLIC-DD		✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗
Titanium apatite deodorising filter without frame	KAF970A46		✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗
Silver particle filter (Ag-ion) with frame	KAF057A41		✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗
Conversion wire harness	EKRS21		✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗

NOTES

1. This option cannot operate together with the wireless LAN functionality that is a standard feature of the indoor unit. When connecting this option to the indoor unit, turn off the indoor unit's wireless LAN functionality.

3D131704A

3 Options

3 - 1 Options

FTXF50-71D

Applicable models	Casing		Factory
	Class	Model	
FTXF50D2V1B	50	BML	DICz
FTXF60D2V1B	60	BML	DICz
FTXF71D2V1B	71	BML	DICz

Option kit	Product name	Remark	FTXF50D2V1B	FTXF60D2V1B	FTXF71D2V1B
Wired remote control	BRC073A1		✓	✓	✓
Wired remote control	BRC944B2		✗	✗	✗
Extension cord for wired remote control (-3-m)	BRCW901A03		✓	✓	✓
Extension cord for wired remote control (-5-m)	BRCW901A08		✓	✓	✓
Interface adaptor for wired remote control	KRP980B1		✗	✗	✗
Interface adaptor for wired remote control	EKRP067A41		✗	✗	✗
Interface adaptor for wired remote control	EKRP980B2		✗	✗	✗
Centralised control board (up to -5- rooms)	KRC72A		✗	✗	✗
Wiring adaptor (normal open contact - normal open pulse contact)	KRP413AB1S		✗	✗	✗
Wi-Fi adaptor for smartphones	BRP069B41	④ ⑤	✓	✓	✓
Wi-Fi adaptor for smartphones	BRP069B42	⑤	✓	✓	✓
Wi-Fi adaptor for smartphones	BRP069B43	⑤	✓	✓	✓
Wi-Fi adaptor for smartphones	BRP069A44	⑥	✓	✓	✓
Wi-Fi adaptor for smartphones	BRP069B45	⑤	✓	✓	✓
Interface adaptor for DIII-NET	KRP928BB2S		✓	✓	✓
Central remote control	DCS302CA51		✗	✗	✗
Unified ON/OFF controller	DCS301BA51		✗	✗	✗
Schedule timer	DST301BA51		✗	✗	✗
Titanium apatite deodorising filter without frame	KAF971A42	①	✗	✗	✗
Titanium apatite deodorising filter without frame	KAF952B42	③	✗	✗	✗
Titanium apatite deodorising filter without frame	KAF970A46	②	✗	✗	✗
Honeycomb deodorising and air-purifying filter without frame	KAF968A42		✗	✗	✗
Honeycomb deodorising filter with frame	KAZ917B41		✗	✗	✗
Honeycomb deodorising filter without frame	KAZ917B42		✗	✗	✗
Air-purifying filter with frame	KAF925B41		✗	✗	✗
Honeycomb deodorising and air-purifying filter with frame	KAF046A41		✗	✗	✗
Anti-theft protection for remote control	KKF910AA4		✗	✗	✗
Anti-theft protection for remote control	KKF917AA4		✗	✗	✗
Anti-theft protection for remote control	KKF936A4		✓	✓	✓
Installation frame for floor-standing units	BKS028A4		✗	✗	✗
Optional remote control BRC480A54 for heating-only indoor units	BRC54A	⑦	✗	✗	✗

LEGEND

- ① Three-dimensional knitted fabric (-42x275-mm) + activated charcoal net
- ② Three-dimensional knitted fabric (-42x255-mm) + activated charcoal net
- ③ Corrugated fiberboard (-42x275-mm)
- ④ Without connection cable
- ⑤ Option -BRP069A**, was replaced by option -BRP069B**.
- ⑥ This option is no longer produced.
- ⑦ Only for France

NOTES

- 1. R32 models

3D095173S


4 Dimensional drawings

4 - 1 Dimensional Drawings

4

ATXF-D FTXF20-42D

The · — · mark shows the piping direction.

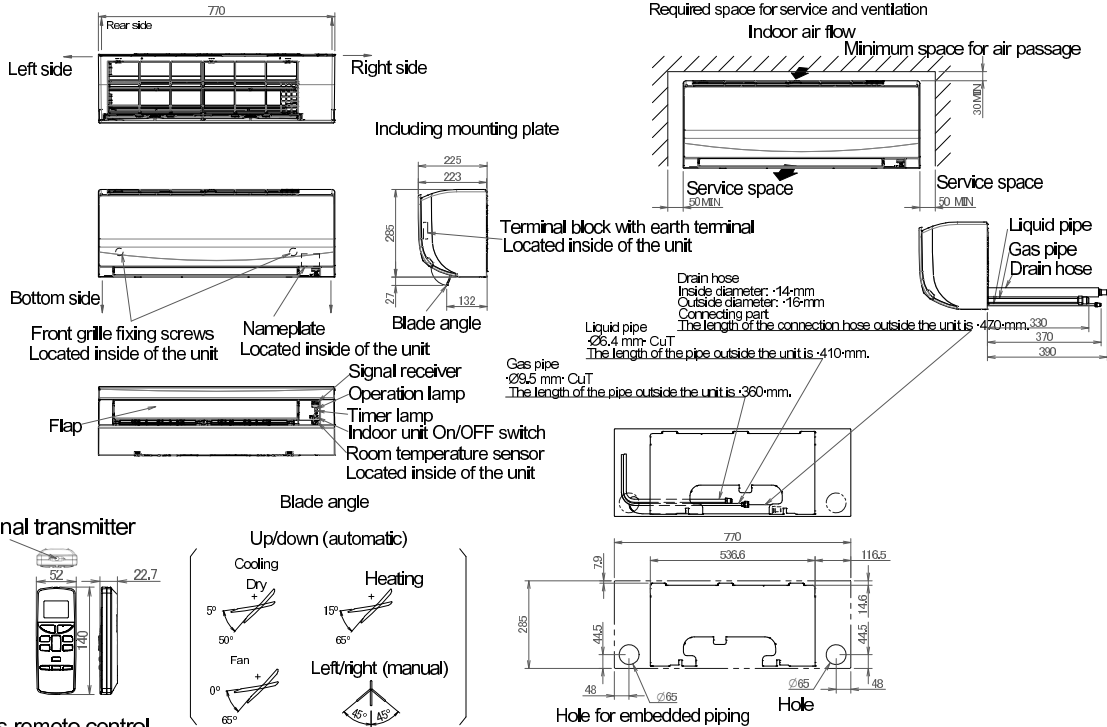


Wireless remote control (ARC470A1)

Standard location of holes in the wall

3D113368

FTXF50-71D

The · — · mark shows the piping direction.

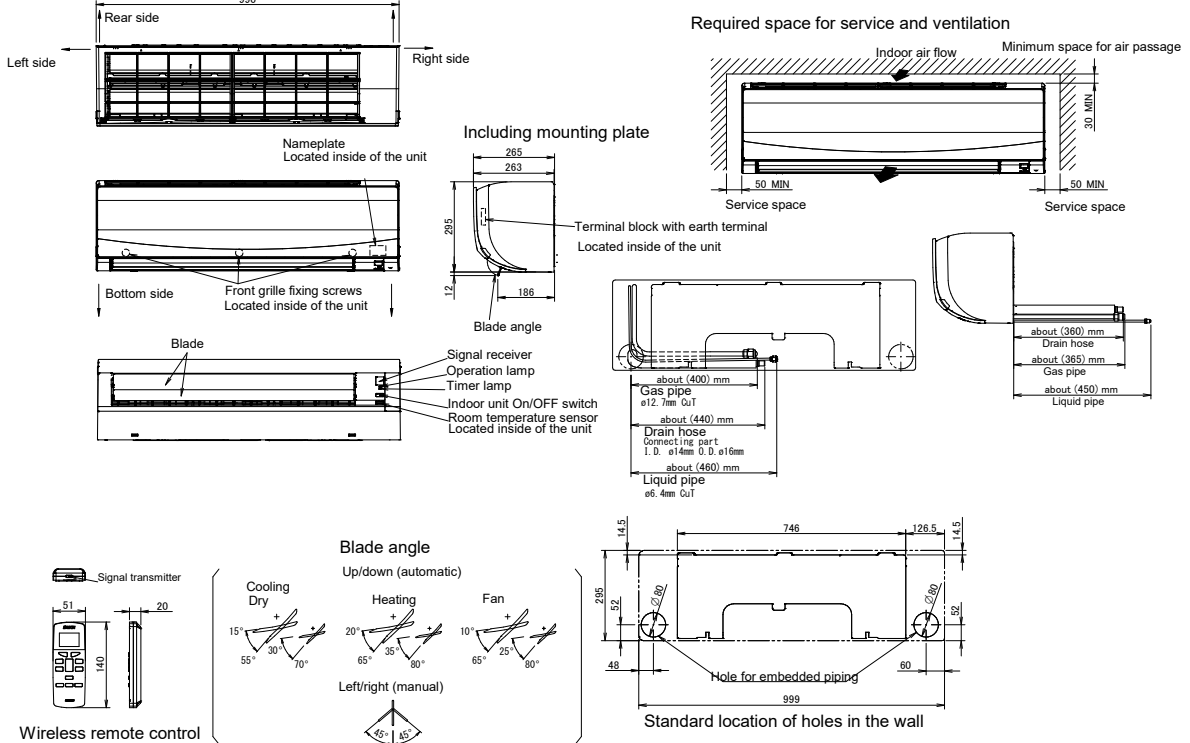

Wireless remote control (ARC470A1)

Standard location of holes in the wall



3D113369A

5 Centre of gravity

5 - 1 Centre of Gravity

ATXF-D
FTXF20-42D

5

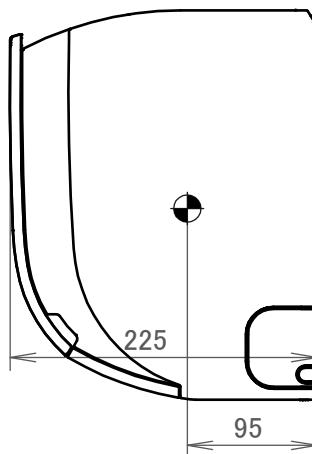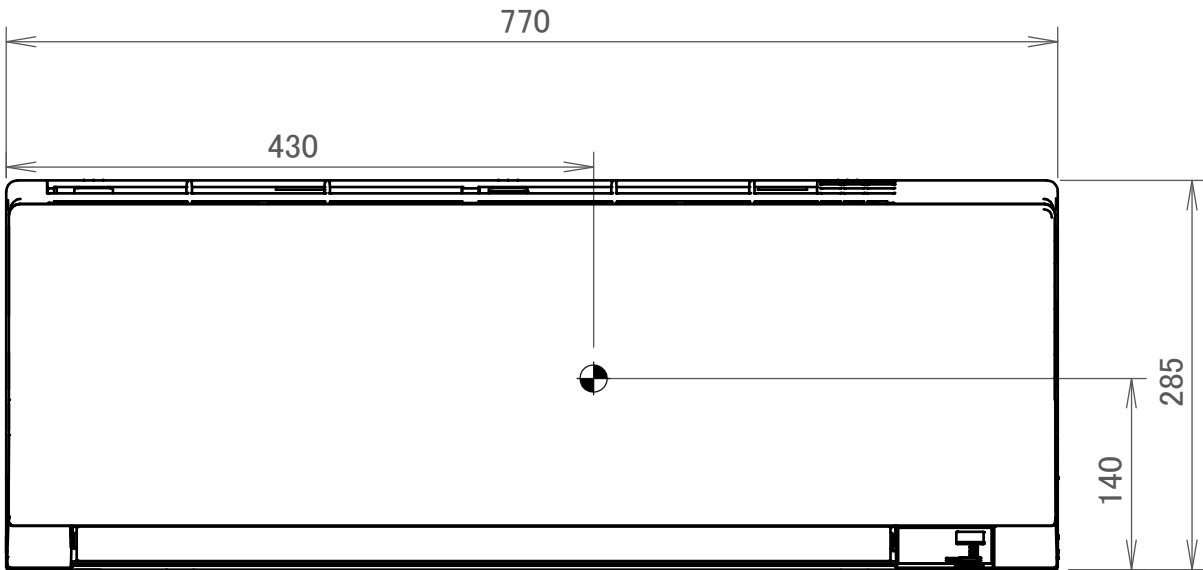



4D094235D

5 Centre of gravity

5 - 1 Centre of Gravity

FTXF50-71D



5

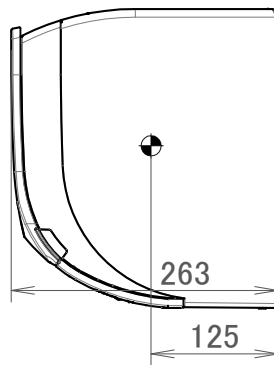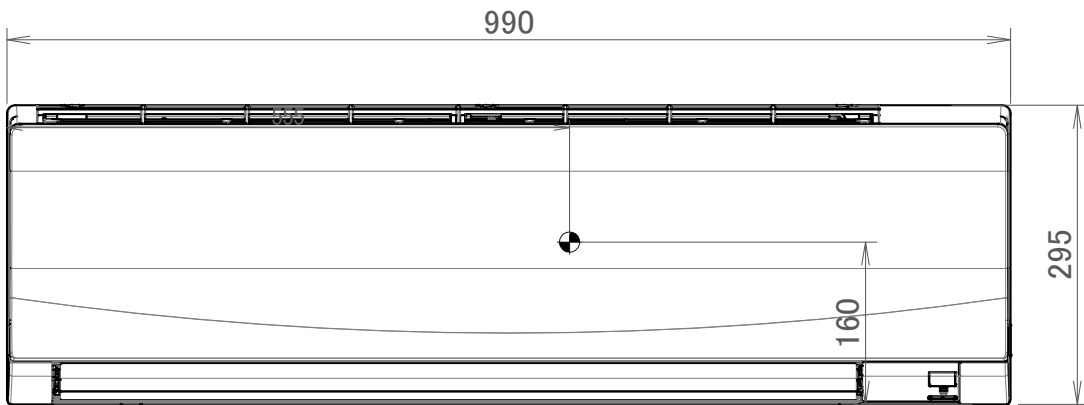

4D113531

6 Piping diagrams

6 - 1 Piping Diagrams

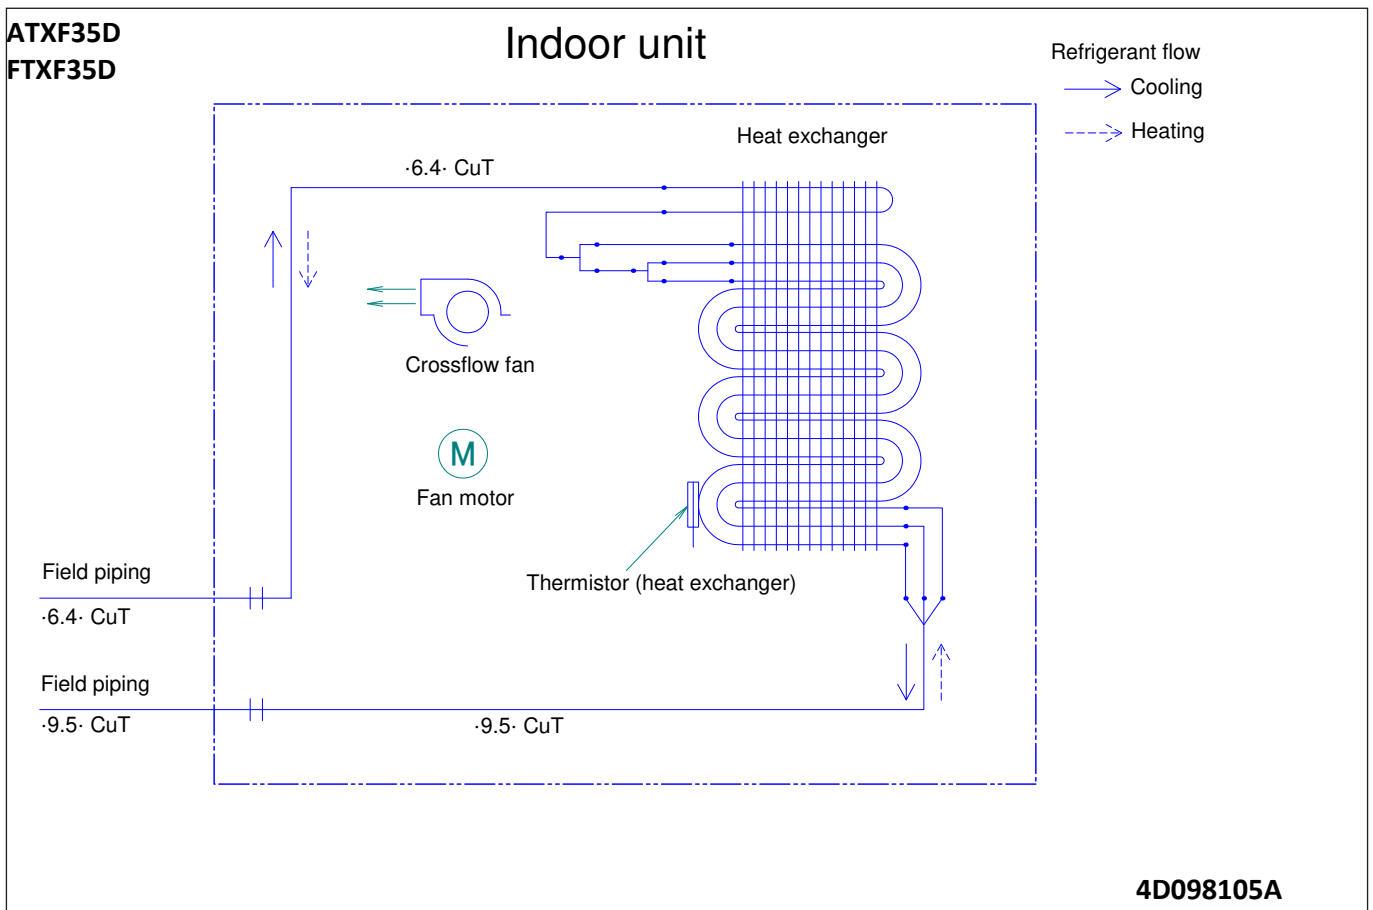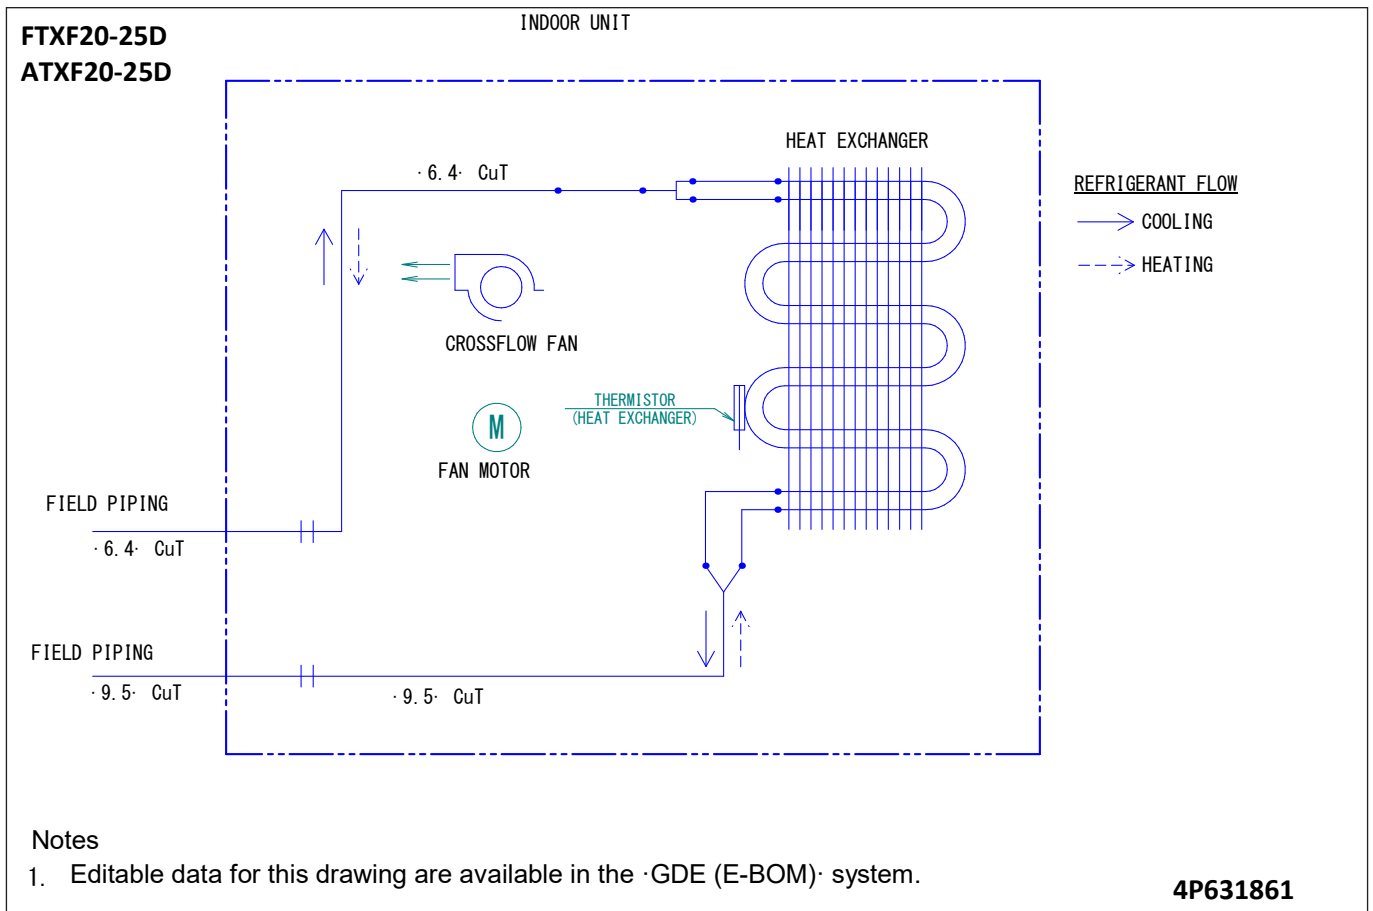

6 Piping diagrams

6 - 1 Piping Diagrams

6


ATXF42D
FTXF42D

INDOOR UNIT

REFRIGERANT FLOW

→ COOLING

- - -> HEATING

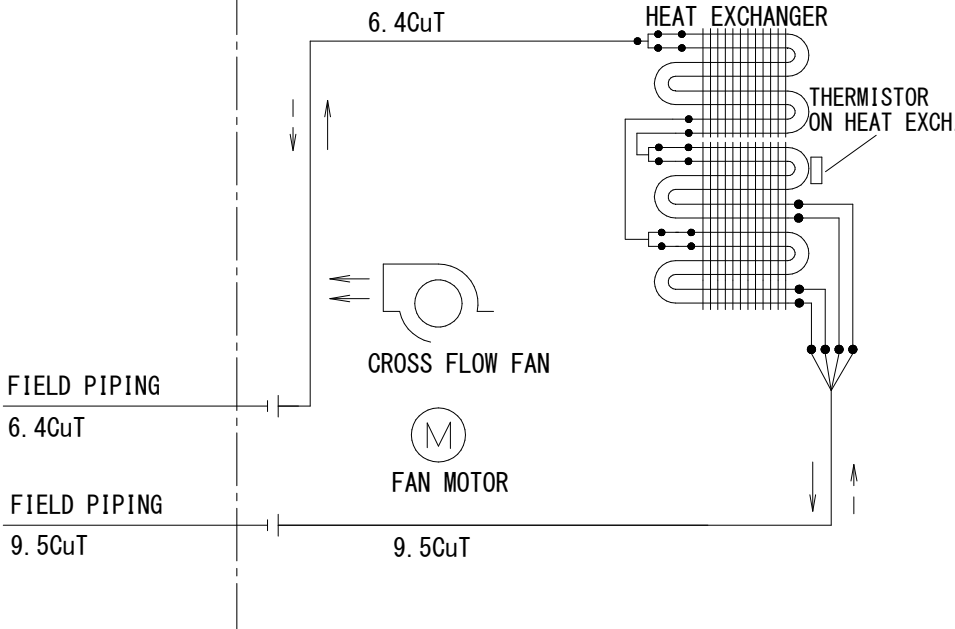

3D130682


FTXF50-71D

Indoor unit

Refrigerant flow

→ Cooling

- - -> Heating

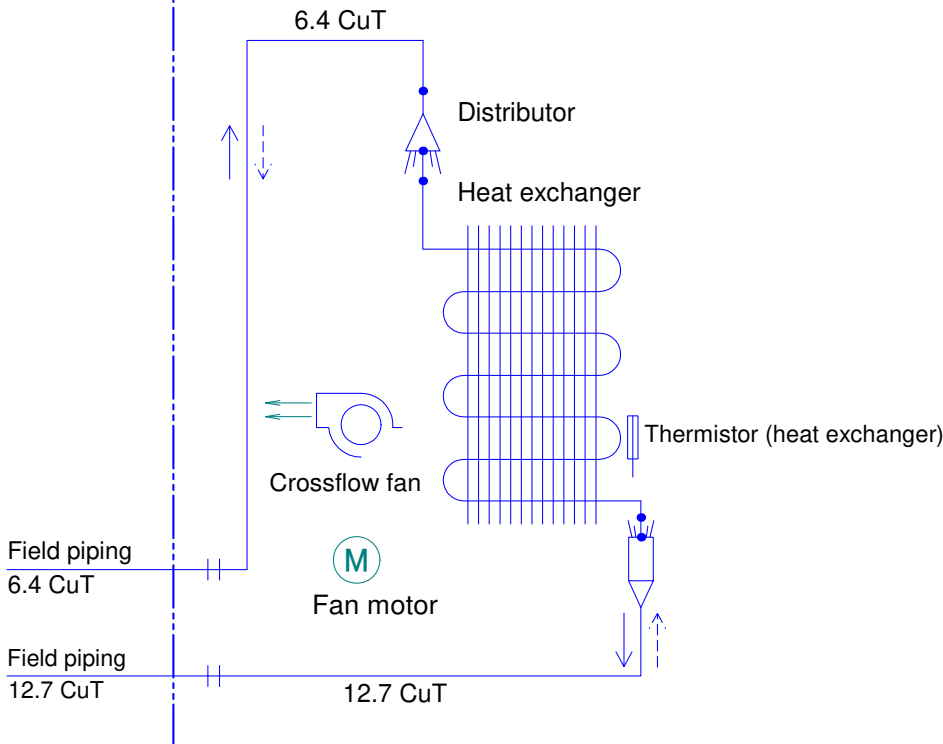


4D101332D

7 Wiring diagrams

7 - 1 Wiring Diagrams - Single Phase

ATXF-D FTXF20-42D

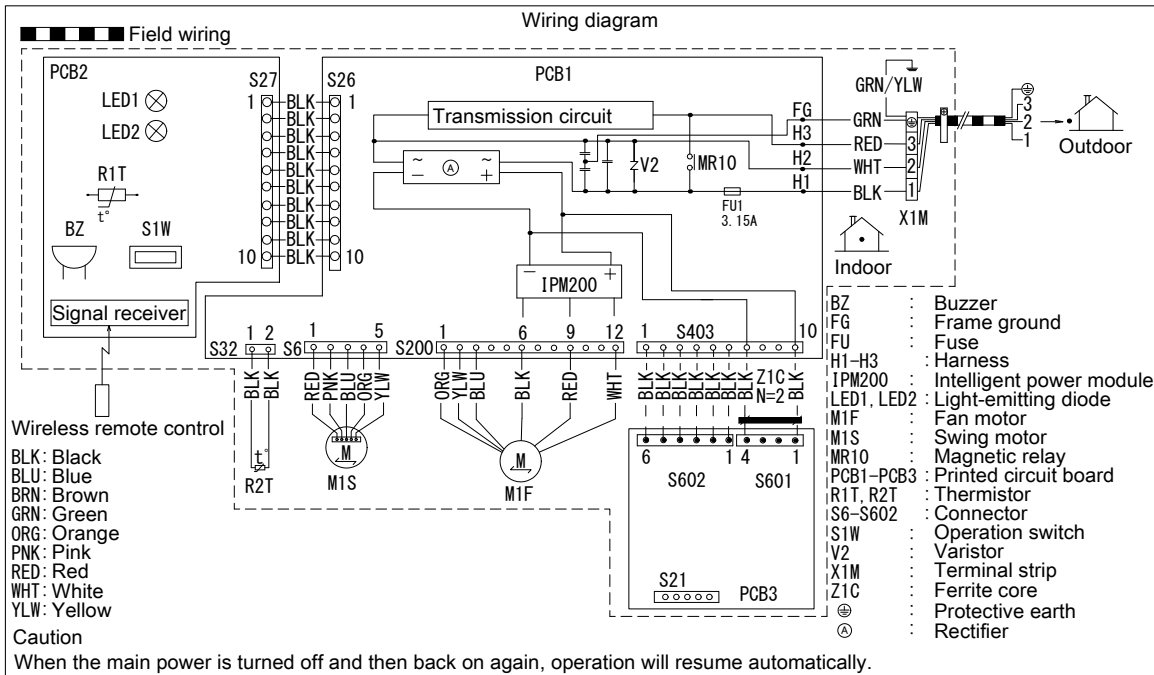


Notes

- 1 Size: length 70 X width 120.
- 2 Refer to purchasing specification AS303002, unless otherwise specified.

3D095416C

FTXF50-71D

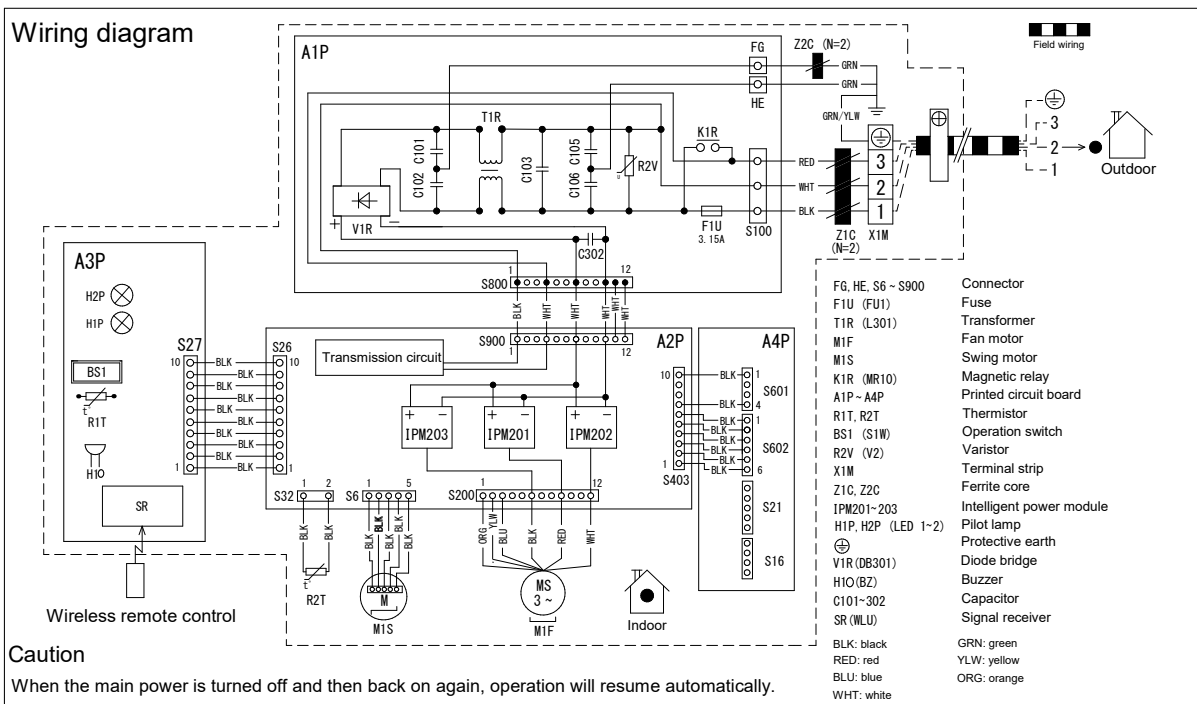

Caution

When the main power is turned off and then back on again, operation will resume automatically.

NOTES:


- 1. Size: length ·65· X width ·110·.
- 2. Refer to purchasing specification ·AS303002·, unless otherwise specified.

3D097876B

8 Sound data

8 - 1 Sound Power Spectrum

8

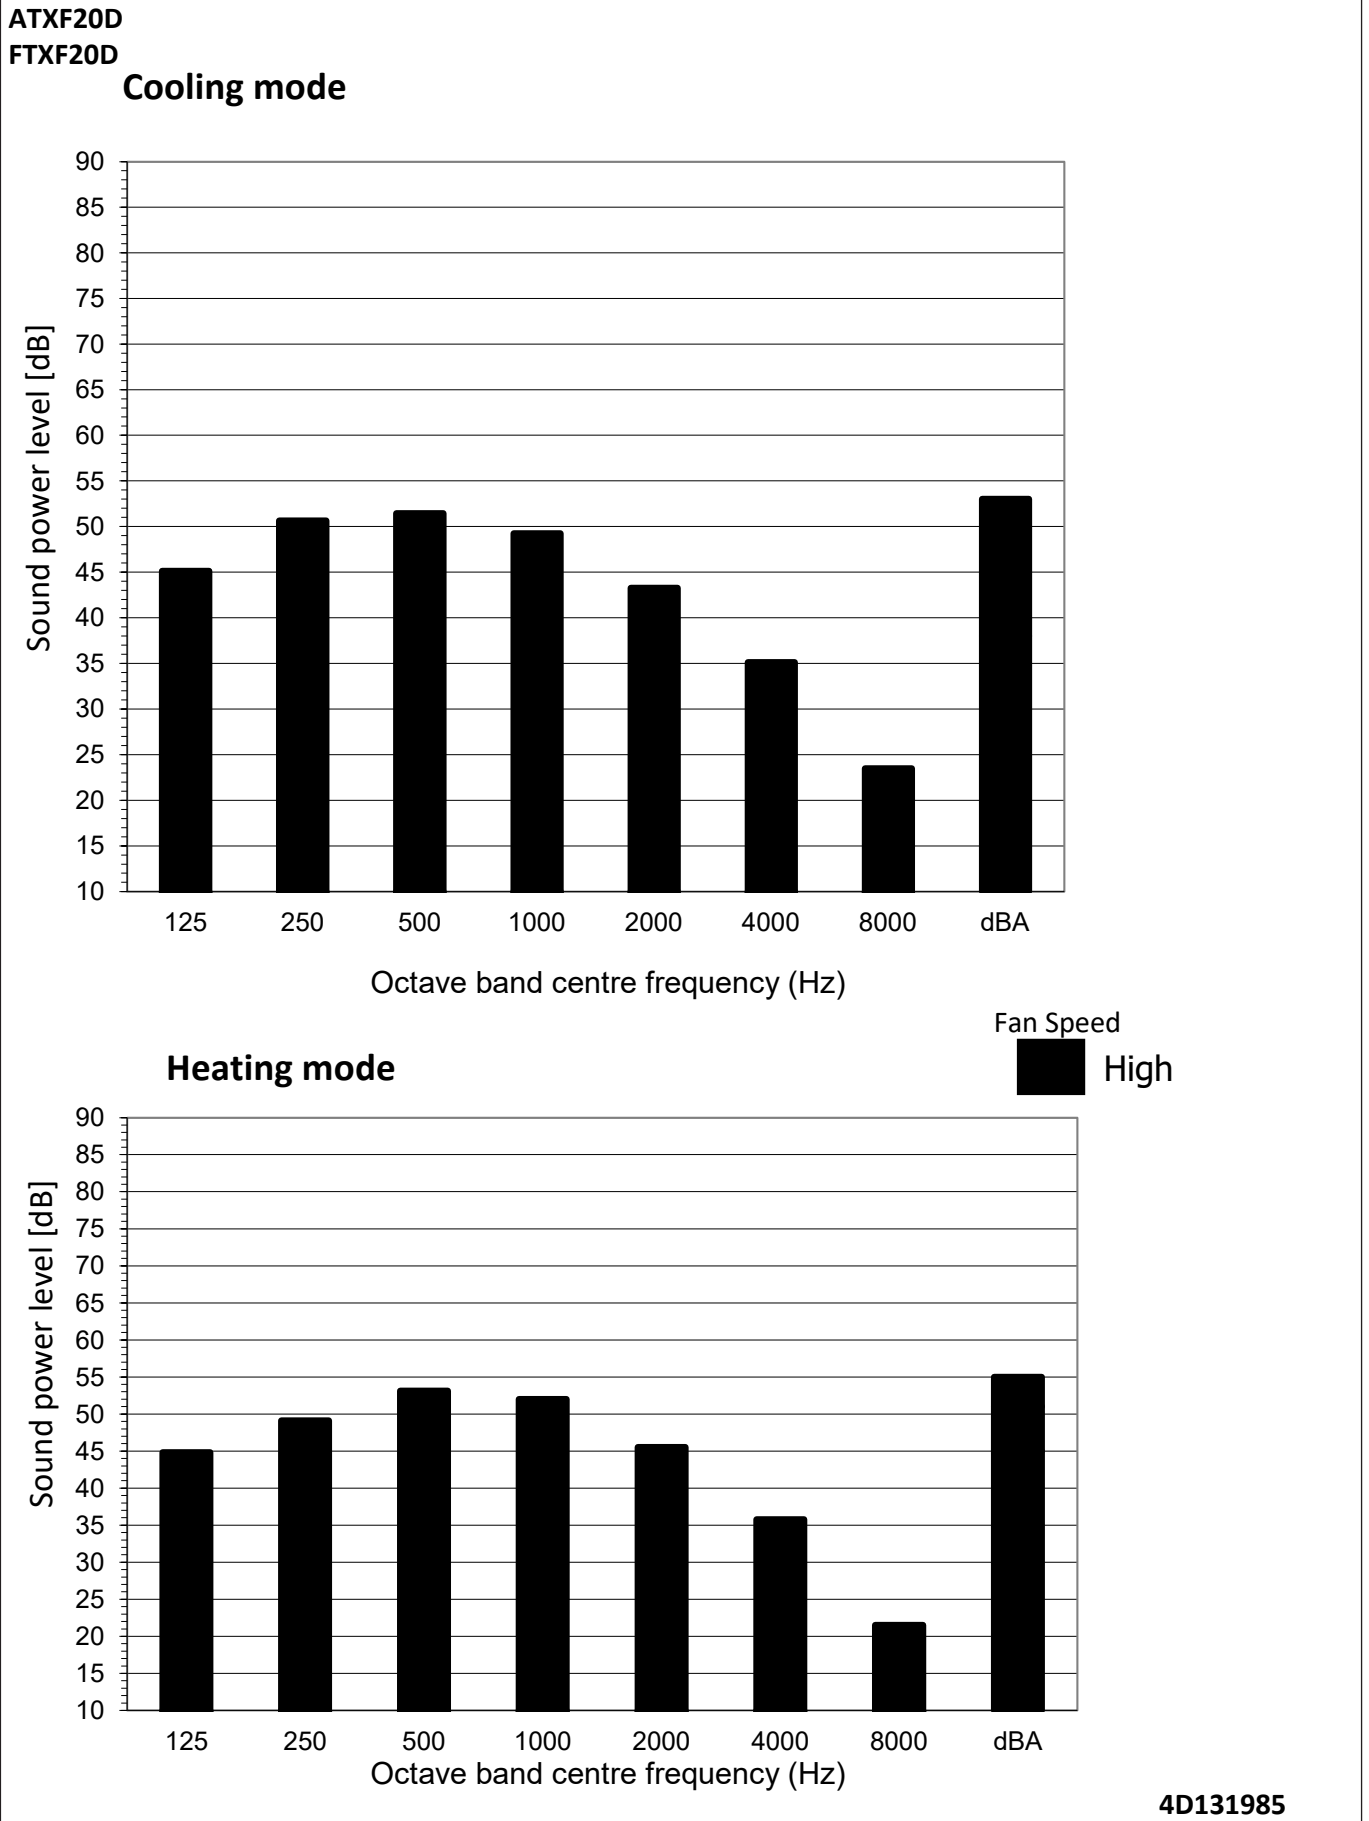


8 Sound data

8 - 1 Sound Power Spectrum


ATXF25D

FTXF25D Cooling mode

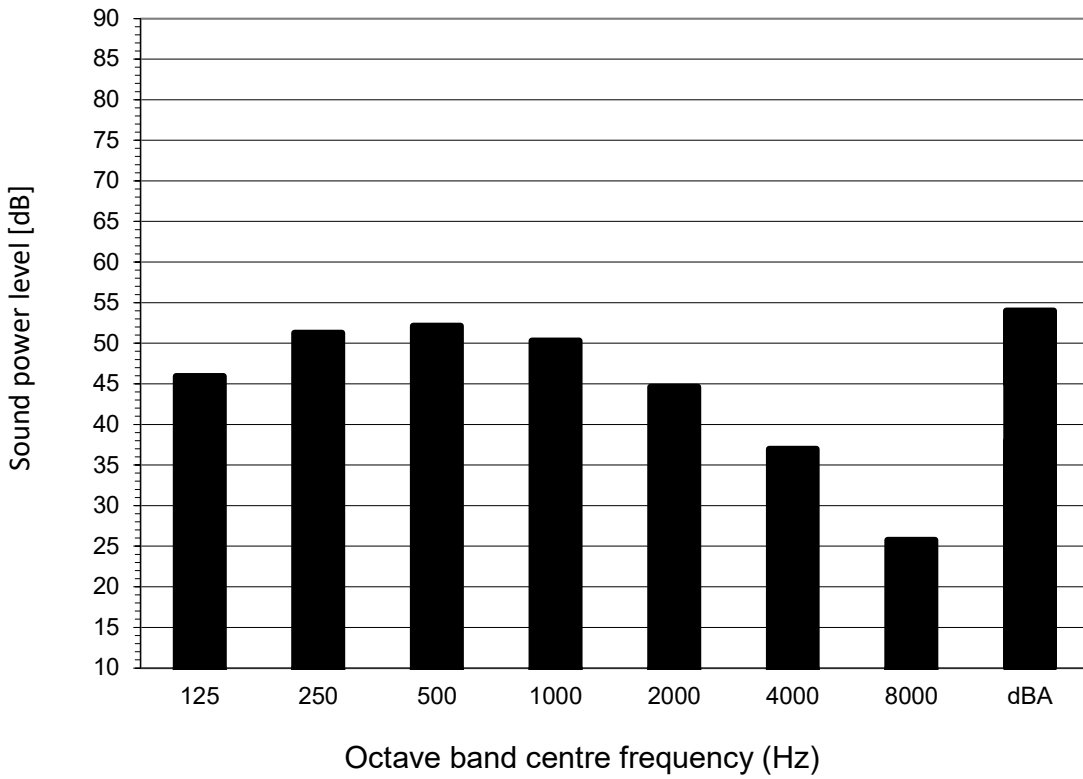

Heating mode

Fan Speed
 High

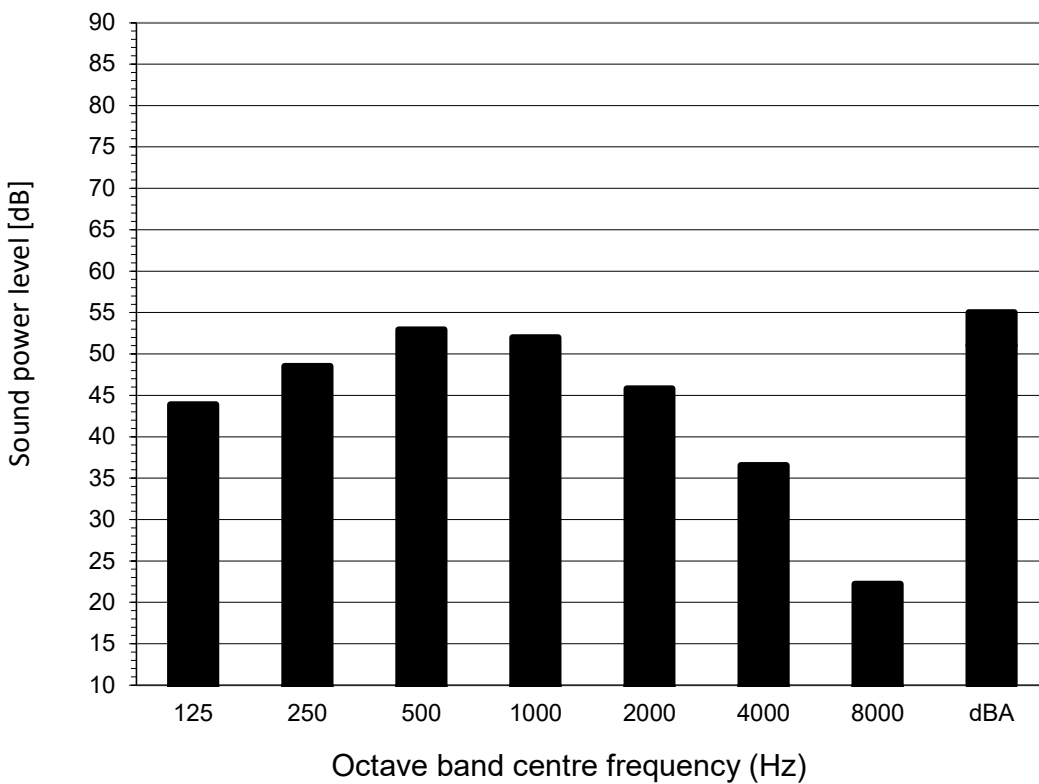


4D131987

8 Sound data

8 - 1 Sound Power Spectrum

8

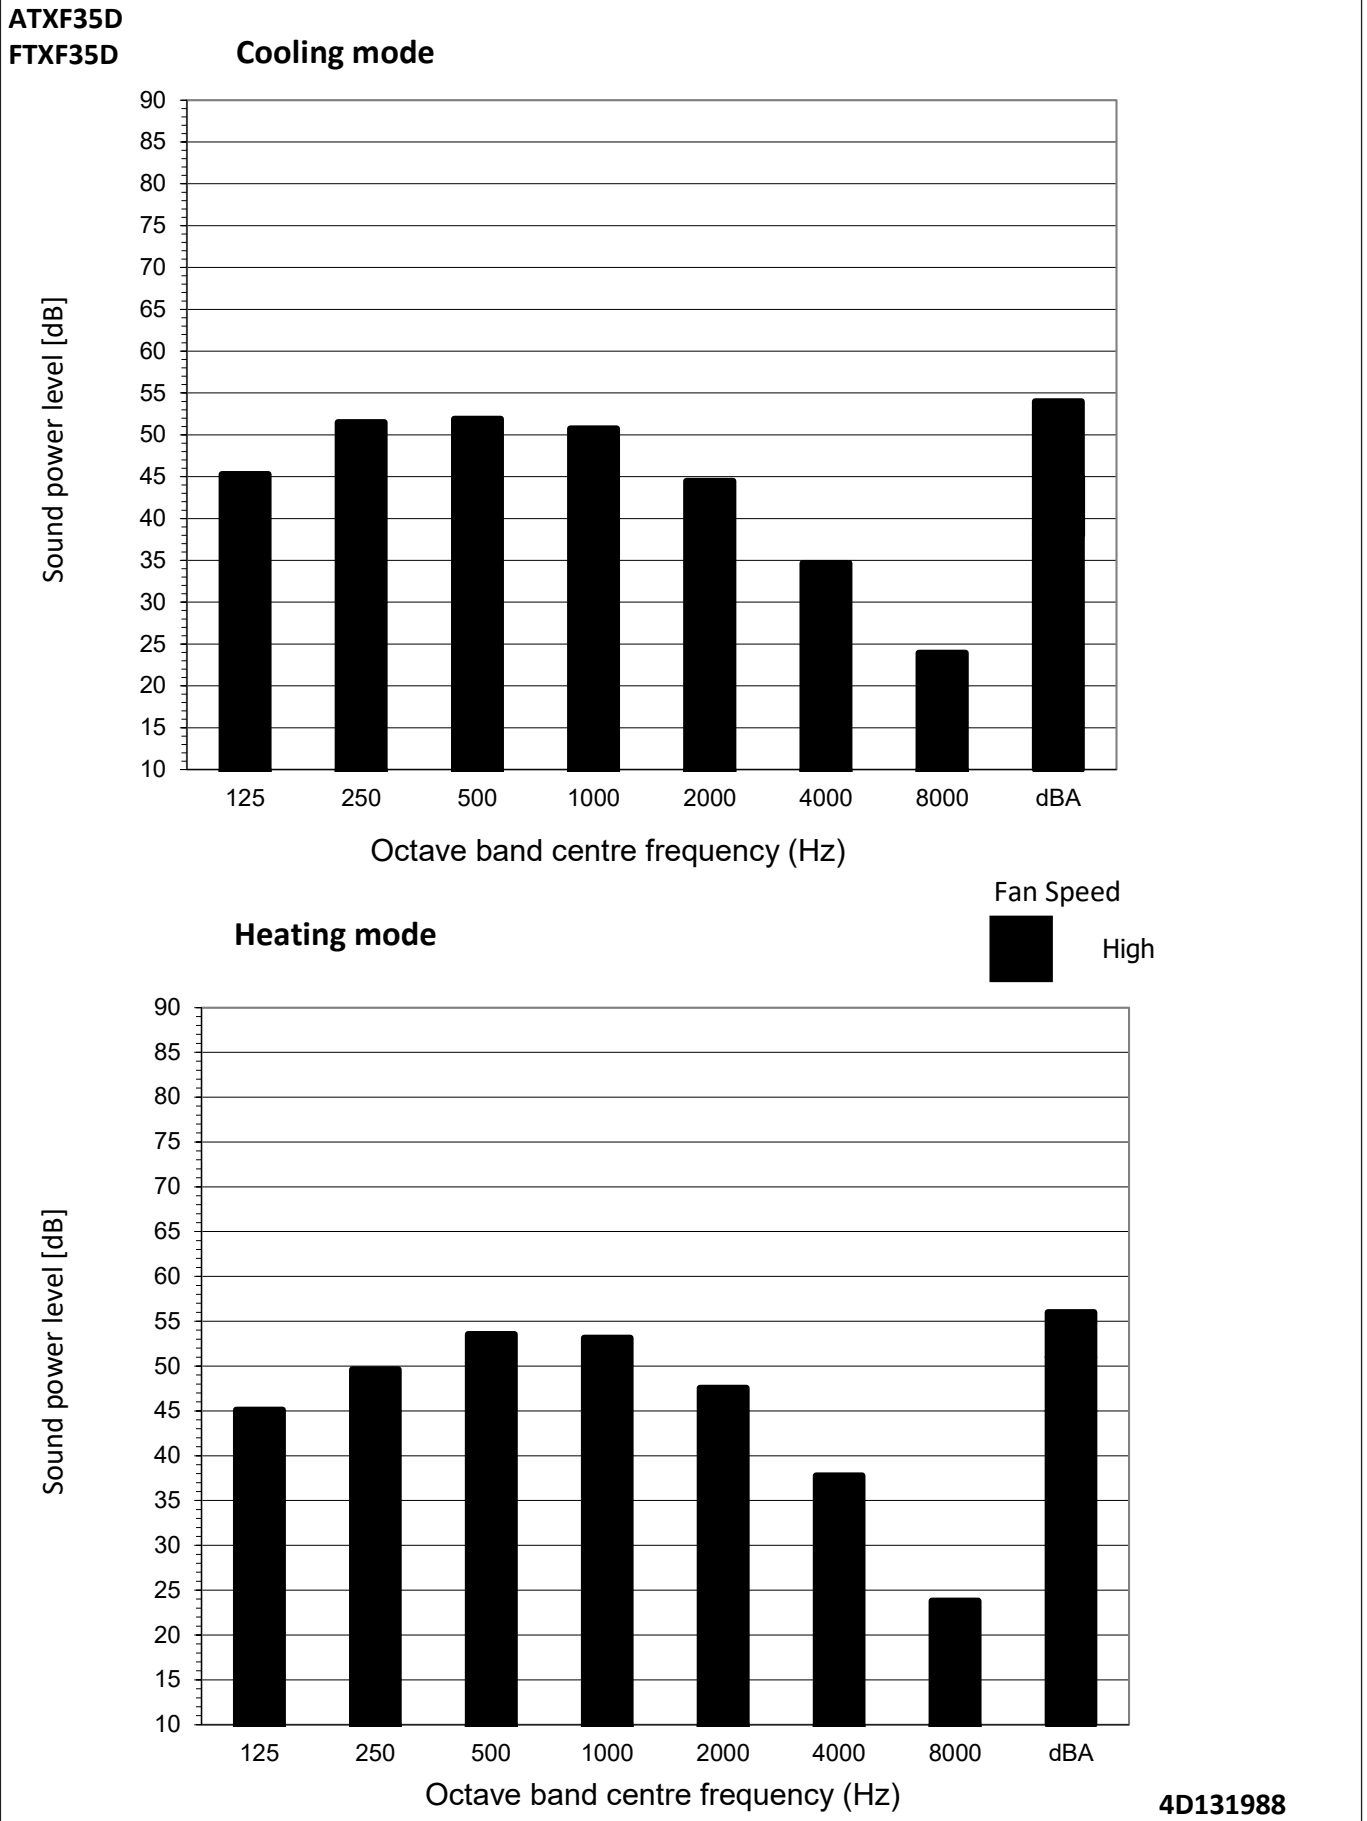


8 Sound data

8 - 1 Sound Power Spectrum


ATXF42D

FTXF42D

Cooling mode

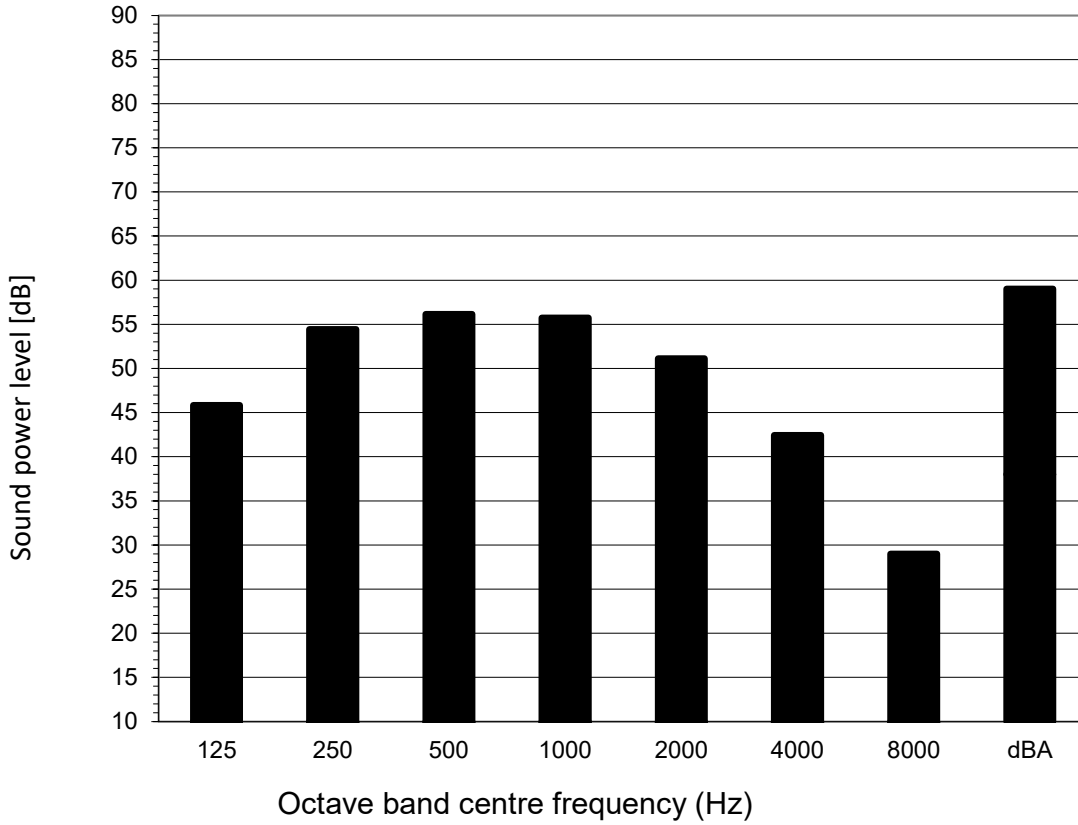

Heating mode

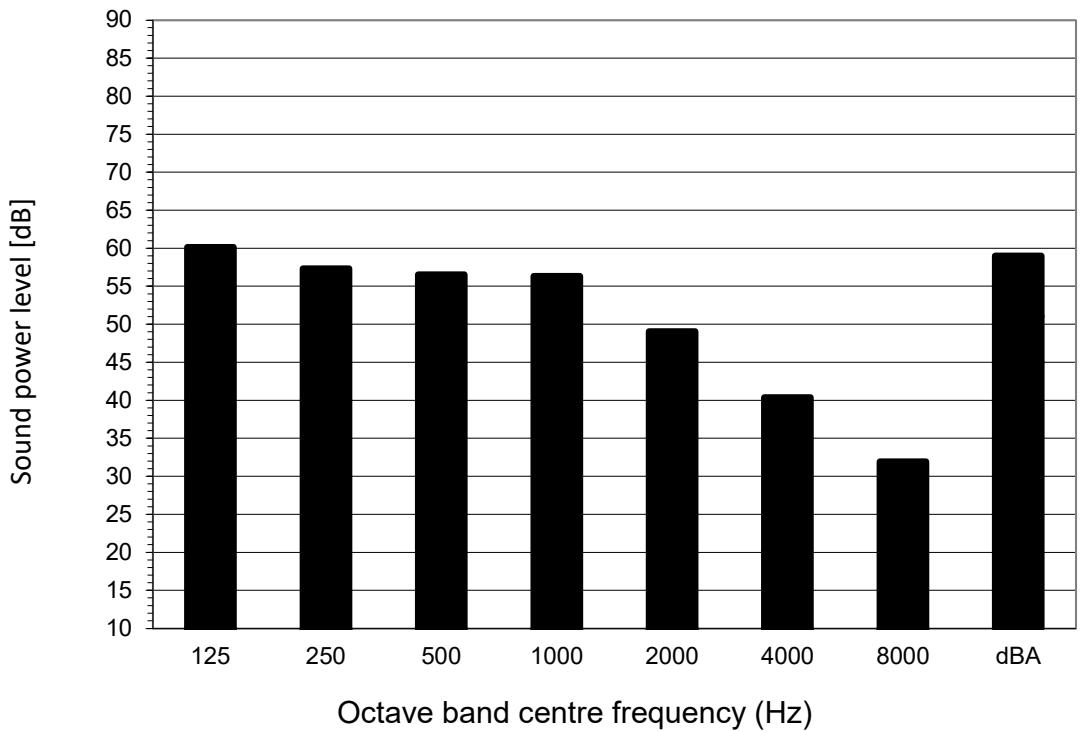


4D131989

8 Sound data

8 - 2 Sound Pressure Spectrum

8

ATXF20D
FTXF20D

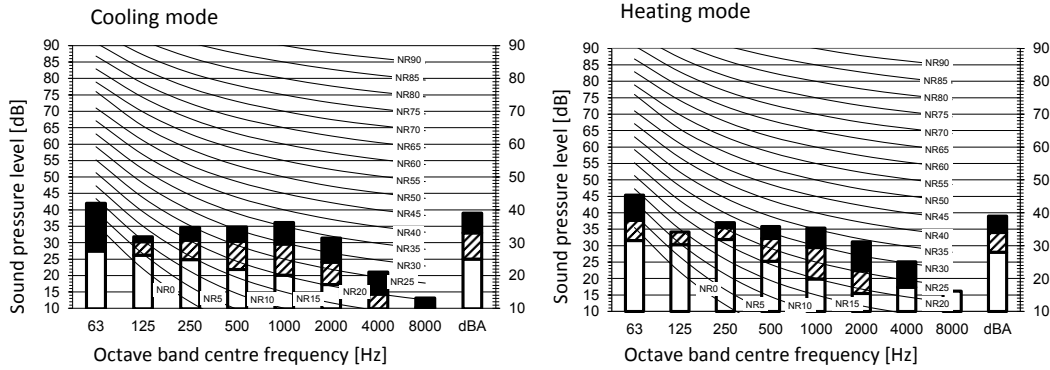

Legend

dBA = A-weighted sound pressure level (A scale according to IEC).


A Scale Fan speed
 B High
 C Medium
 D Low

Cooling		Total dB	
A	B	C	D
dBA	39	33	25

Heating		Total dB	
A	B	C	D
dBA	39	34	28

Notes


Location of microphone



- Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
- Background noise already taken into account.
- Operating noise varies depending on operation and ambient conditions.
- The operation noise measuring method is in accordance with JISC9612.
- Measuring location: anechoic chamber

3D108789A

ATXF25D
FTXF25D

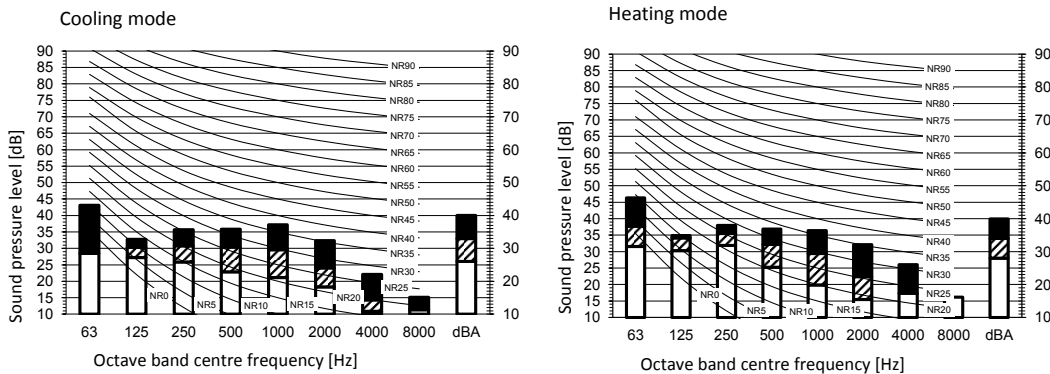

Legend

dBA = A-weighted sound pressure level (A scale according to IEC).


A Scale Fan speed
 B High
 C Medium
 D Low

Cooling		Total dB	
A	B	C	D
dBA	40	33	26

Heating		Total dB	
A	B	C	D
dBA	40	34	28

Notes

Location of microphone





- Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
- Background noise already taken into account.
- Operating noise varies depending on operation and ambient conditions.
- The operation noise measuring method is in accordance with JISC9612.
- Measuring location: anechoic chamber

3D108790A

8 Sound data

8 - 2 Sound Pressure Spectrum

ATXF35-42D
FTXF35-42D

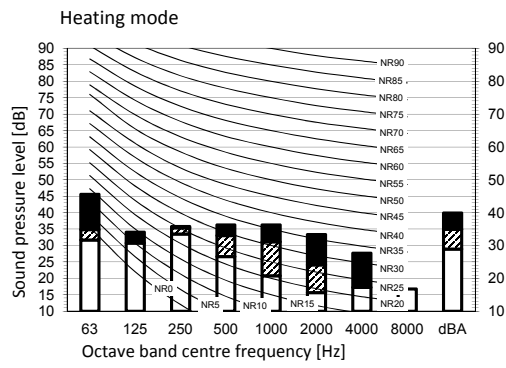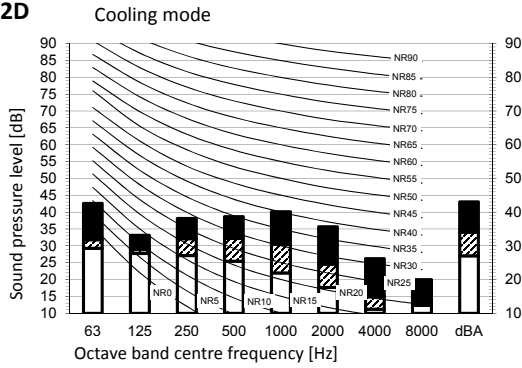

Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

- A Scale Fan speed
 B High
 C Medium
 D Low


Cooling		Total dB	
A	B	C	D
dBA	43	34	27

Heating		Total dB	
A	B	C	D
dBA	40	35	29

Notes



- Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
- Background noise already taken into account.
- Operating noise varies depending on operation and ambient conditions.
- The operation noise measuring method is in accordance with JISC9612.
- Measuring location: anechoic chamber

Location of microphone



3D108791A

FTXF50D

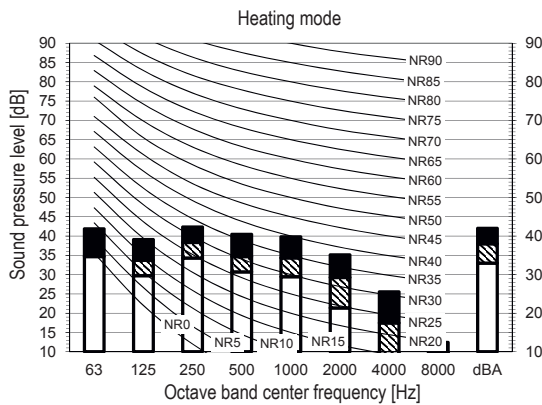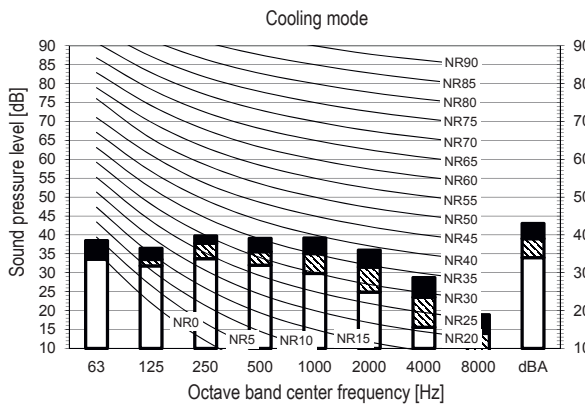


LEGEND

dBA = A-weighted sound pressure level (A scale according to IEC).

- A Scale
 B Fan speed: High
 C Fan speed: Medium
 D Fan speed: Low

Location of microphone



Cooling Total db

A	B	C	D
dBA	43	39	34

Heating Total dB

A	B	C	D
dBA	42	38	33

NOTES

- Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
- Background noise already taken into account.
- Operating noise varies depending on operation and ambient conditions.
- The operation noise measuring method is in accordance with JISC9612.
- Measuring location: anechoic chamber
- Editable data for this drawing are available in the GDE (E-BOM) system.


3D108792A

8 Sound data

8 - 2 Sound Pressure Spectrum

8

FTXF60D

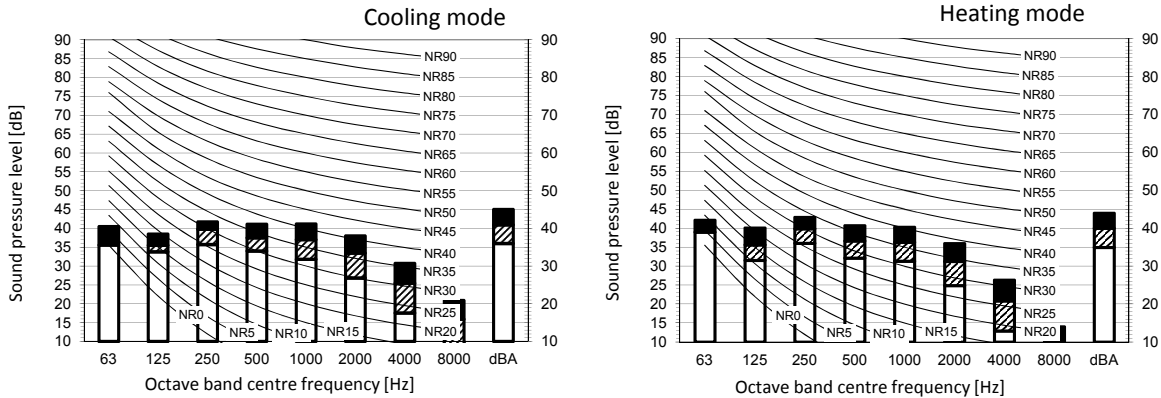

Legend


dBA = A-weighted sound pressure level (A scale according to IEC).

A	Scale	Fan speed
B	High	
C	Medium	
D	Low	

Cooling		Total dB	
A	B	C	D
dBA	45	41	36

Heating		Total dB	
A	B	C	D
dBA	44	40	35

Location of microphone




Notes

1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber

3D108793A

FTXF71D

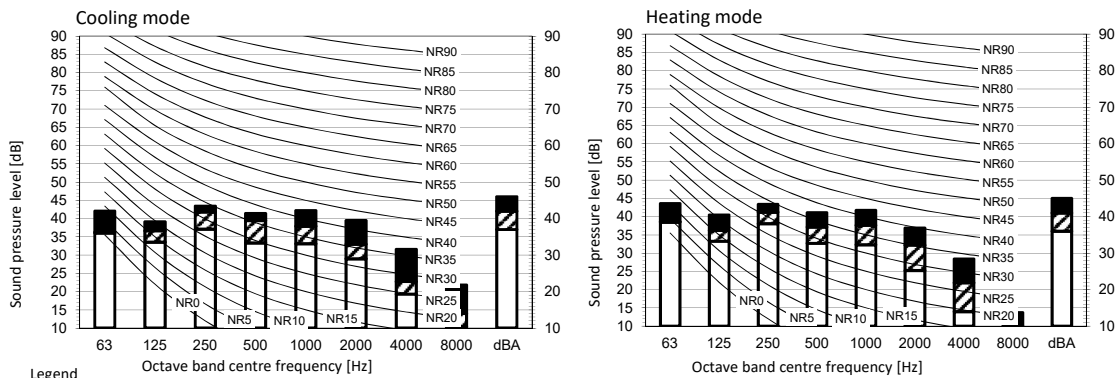

Legend


dBA = A-weighted sound pressure level (A scale according to IEC).

A	Scale	Fan speed
B	High	
C	Medium	
D	Low	

Cooling		Total dB	
A	B	C	D
dBA	46	42	37

Heating		Total dB	
A	B	C	D
dBA	45	41	36

Location of microphone




Notes

1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber

3D115181

Daikin Europe N.V. Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Responsible Editor)



EEDEN22A

02/2022



Daikin Europe N.V. participates in the ECP programmes for Fan Coil Units and Variable Refrigerant Flow systems, Daikin Applied Europe S.p.A. participates in the ECP programmes for Liquid Chilling Packages and Hydronic Heat Pumps. Check ongoing validity of certificate: www.eurovent-certification.com

The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. / Daikin Central Europe HandelsGmbH. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH have compiled the content of this publication to the best of their knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.